



## GS Technical Data Sheet

### GS EFB027 - GS EFB Stop Start

#### Performance

|                          |      |
|--------------------------|------|
| Voltage                  | 12V  |
| Capacity (20-hour)       | 60Ah |
| Cold Cranking Amps (EN1) | 560A |

#### Dimensions

|        |       |
|--------|-------|
| Length | 242mm |
| Width  | 175mm |
| Height | 190mm |

#### Weights & Measures

|                       |        |
|-----------------------|--------|
| Mean Weight with Acid | 16.6kg |
|-----------------------|--------|

#### Container Features

|                           |                |
|---------------------------|----------------|
| Case Type                 | L2 DIN EFB     |
| Hold Down                 | B3             |
| State of Charge Indicator | ✓              |
| Handles                   | ✓              |
| End Venting               | ✓              |
| Lid Type                  | SMF Double Lid |



#### Technology

|                           |                   |
|---------------------------|-------------------|
| Flame Arrestor Technology | ✓                 |
| Separator                 | Ca/Ca<br>PE       |
| VDA Roll Over Test        | ✓                 |
| Vibration                 | V3 (60Hz/6g/20hr) |
| Recommended Charge Rate   | 4A                |
| Performance Marking       | W4-C2-V3-M2       |

#### Terminal Type

##### T1


Standard DIN Post




Positive Terminal

Negative Terminal

#### Cell Assembly Layout

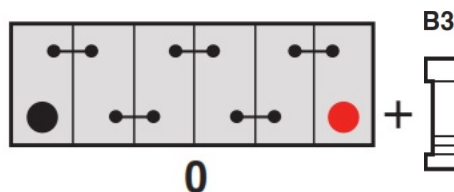

#### Battery Hold-down

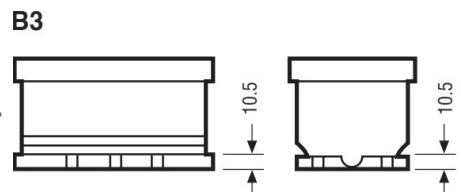

Data Sheet generated on 18/05/2021 - E&OE