



GS Scheda Tecnica

GS SMF054 - GS SMF Battery

Prestazione

Tensione	12V
Capacità (20 ore)	36Ah
Corrente di spunto A (EN1)	330A

Dimensioni

Lunghezza	187mm
Profondità	127mm
Altezza	223mm

Pesi e Misure

Peso medio con acido	9kg
----------------------	-----



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS B19
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V3-E1


Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

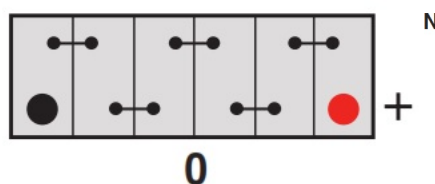

Fissaggio batteria



Scheda tecnica prodotta su E&OE



GS Technical Data Sheet

GS SMF054 - GS SMF Battery

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	127mm
Height	223mm

Weights & Measures

Mean Weight with Acid	9kg
-----------------------	-----

Container Features

Case Type	JIS B19
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓

Technology


Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W4-C2-V3-E1




Terminal Type

T1/T3

Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout



Battery Hold-down



Data Sheet generated on 18/10/2024 - E&OE