



GS Scheda Tecnica

GS SMF056 - GS SMF Battery

Prestazione

Tensione	12V
Capacità (20 ore)	36Ah
Corrente di spunto A (EN1)	330A

Dimensioni

Lunghezza	187mm
Profondità	135mm
Altezza	224mm

Pesi e Misure

Peso medio con acido	9.4kg
----------------------	-------



Caratteristiche del Monoblocco

Tipo di monoblocco	JIS NS40 + B1
Fissaggi alla base	B1
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓


Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V2-E1


Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

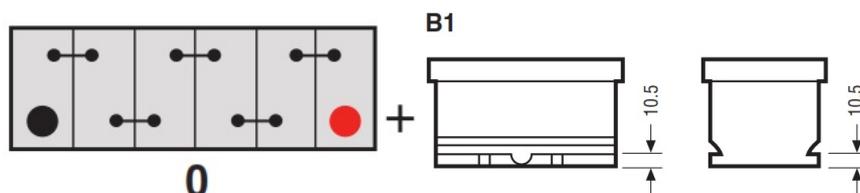

Fissaggio batteria

Scheda tecnica prodotta su E&OE



GS Technical Data Sheet

GS SMF056 - GS SMF Battery

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	135mm
Height	224mm

Weights & Measures

Mean Weight with Acid	9.4kg
-----------------------	-------



Container Features

Case Type	JIS NS40 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W4-C2-V2-E1


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3




Cell Assembly Layout

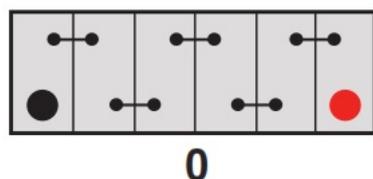

Battery Hold-down

B1

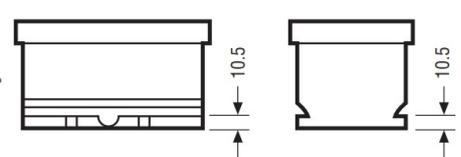

Data Sheet generated on 18/10/2024 - E&OE