



GS Scheda Tecnica

GS SMF057 - GS SMF Battery

Prestazione

Tensione	12V
Capacità (20 ore)	45Ah
Corrente di spunto A (EN1)	400A

Dimensioni

Lunghezza	238mm
Profondità	129mm
Altezza	224mm

Pesi e Misure

Caratteristiche del Monoblocco

Tipo di monoblocco	JIS B24
Schema polarità	1
Fissaggi alla base	N
Indicatore dello stato di carica	✓
Maniglie	✓
Circuito di sfiato	✓

Tecnologia


Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca
Separatore	PE
Corrente di carica raccomandata	3A
Performance Marking	W4-C2-V2-E1




Tipologia dei terminali

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Schema di Collegamento

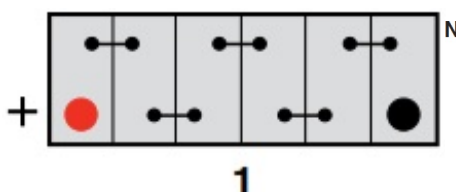

Fissaggio batteria



Scheda tecnica prodotta su E&OE



GS Technical Data Sheet

GS SMF057 - GS SMF Battery

Performance

Voltage	12V
Capacity (20-hour)	45Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	238mm
Width	129mm
Height	224mm

Weights & Measures

Container Features

Case Type	JIS B24
Cell Layout	1
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓

Technology


Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
Recommended Charge Rate	3A
Performance Marking	W4-C2-V2-E1




Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

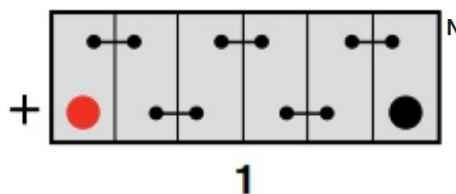

Battery Hold-down



Data Sheet generated on 18/10/2024 - E&OE