



## Yuasa Scheda Tecnica

### Yuasa HJ-S34B20L

#### Prestazione

Tensione	12V
Capacità (20 ore)	35Ah
Corrente di spunto A (EN1)	272A

#### Dimensioni

Lunghezza	197mm
Profondità	129mm
Altezza	227mm

#### Pesi e Misure

Peso medio con acido	10.5kg
----------------------	--------



#### Caratteristiche del Monoblocco


Tipo di monoblocco	B20 JIS AGM
Fissaggi alla base	N
Circuito di sfiato	✓
Applicazioni da semi trazione	✓
Tipo di coperchio	VRLA

#### Tecnologia

Pastiglia antideflagrante	✓
Tecnologia	Ca/Ca VRLA
Separatore	AGM
Vibrazioni	V1 (30Hz/3g/2hr)
Corrente di carica raccomandata	2A
Performance Marking	W5-C2-V2-E2


#### Tipologia dei terminali

**T3**  
Small Japanese  
JIS Terminal



Positive Terminal Negative Terminal

#### Schema di Collegamento

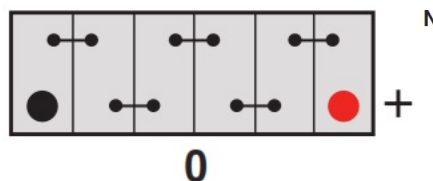

#### Fissaggio batteria



Scheda tecnica prodotta su E&OE



## Yuasa Technical Data Sheet

### Yuasa HJ-S34B20L

#### Performance

Voltage	12V
Capacity (20-hour)	35Ah
Cold Cranking Amps (EN1)	272A

#### Dimensions

Length	197mm
Width	129mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	10.5kg
-----------------------	--------



#### Container Features


Case Type	B20 JIS AGM
Hold Down	N
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA

#### Technology


Flame Arrestor Technology	✓
Separator	Ca/Ca VRLA
Vibration	AGM
Recommended Charge Rate	V1 (30Hz/3g/2hr)
Performance Marking	2A
	W5-C2-V2-E2

#### Terminal Type

**T3**  
Small Japanese  
JIS Terminal



#### Cell Assembly Layout

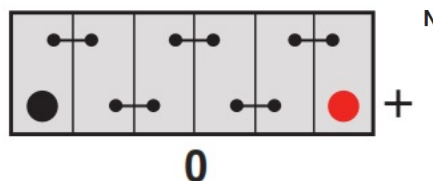

#### Battery Hold-down



Data Sheet generated on 30/10/2024 - E&OE